




Válvulas de esfera 'Basic'

V/b actuador neumático. simple efecto s r/h ITEM 254

| REFERÊNCIA | DESCRIÇÃO | Peso líquido | Volume (m ³) | Peso bruto | Unidades por lote |
|------------|---|--------------|--------------------------|------------|-------------------|
| 1011219 | VALVULA União ACT. NEUM. SE R/H 1/2" PTFE | 2,354 | 0,01553 | 2,6807 | 1 |
| 1011220 | VALVULA União ACT. NEUM. SE R/H 3/4" PTFE | 2,394 | 0,02244 | 2,934 | 1 |
| 1011221 | VALVULA União ACT. NEUM. SE R/H 1" PTFE | 2,515 | 0,03129 | 3,075 | 1 |
| 1011222 | VALVULA União ACT. NEUM. SE R/H 1 1/4" PTFE | 2,74 | 0,03129 | 3,3 | 1 |
| 1011223 | VALVULA União ACT. NEUM. SE R/H 1 1/2" PTFE | 3,016 | 0,03129 | 3,576 | 1 |
| 1011224 | VALVULA União ACT. NEUM. SE R/H 2" PTFE | 4,204 | 0,03648 | 4,904 | 1 |
| 1011225 | VALVULA União ACT. NEUM. SE R/H 2 1/2" PTFE | 6,039 | 0,04460 | 6,879 | 1 |
| 1011226 | VALVULA União ACT. NEUM. SE R/H 3" PTFE | 7,735 | 0,04460 | 8,575 | 1 |
| 1011227 | VALVULA União ACT. NEUM. SE R/H 4" PTFE | 8,774 | 0,04460 | 9,614 | 1 |



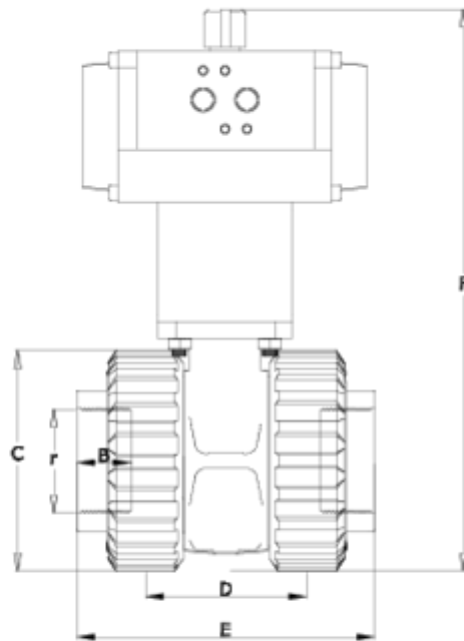

ITEM 254 | V/b actuador neumático. simples efecto s r/h

| CÓDIGO | r | PESO (g) | DN | Actuador | B | C | D | E | F | G | PN | TIPO ROSCA |
|--------|--------|----------|-----|----------|----|-----|-----|-----|-----|-----|------|------------|
| 11219 | 1/2" | 2354 | 15 | H050SE | 17 | 52 | 47 | 91 | 211 | 138 | PN16 | BSP |
| 11220 | 3/4" | 2394 | 20 | H050SE | 20 | 59 | 51 | 101 | 219 | 138 | PN16 | BSP |
| 11221 | 1" | 2515 | 25 | H050SE | 23 | 70 | 66 | 120 | 230 | 138 | PN16 | BSP |
| 11222 | 1 1/4" | 2740 | 32 | H063SE | 26 | 84 | 72 | 134 | 249 | 156 | PN16 | BSP |
| 11223 | 1 1/2" | 3016 | 40 | H063SE | 33 | 99 | 77 | 153 | 267 | 156 | PN16 | BSP |
| 11224 | 2" | 4204 | 50 | H063SE | 29 | 121 | 90 | 161 | 352 | 156 | PN16 | BSP |
| 11225 | 2 1/2" | 6039 | 65 | H075SE | 33 | 151 | 121 | 204 | 426 | 210 | PN10 | BSP |
| 11226 | 3" | 7735 | 80 | H100SE | 36 | 175 | 141 | 234 | 450 | 281 | PN10 | BSP |
| 11227 | 4" | 8774 | 100 | H100SE | 42 | 210 | 155 | 267 | 477 | 281 | PN10 | BSP |





Documentación do Produto



Certificados do Produto



Certificados da Empresa

